



REMSNELKOPPELING

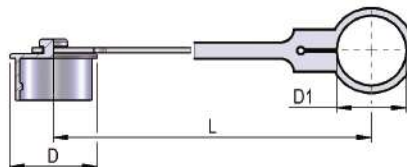

Norm: ISO 5676
Materiaal: staal
Finish: Zn-Fe (CR 3)
Standaard Seals: NBR
Temperatuur bereik: -25°C + 100°C
Optionele seals: FKM, FFKM, EPDM, etc
Werkdruk: 150 bar
Onderdruk koppelen: nee

BG	draad	WD bar	code	vrouwdeel	Ø mm	L mm	code	mandeel	Ø mm	L mm
3	3/8 BSP	150	90001424	SRKF08-06BFF	44	55,5				
3	1/2 BSP	150	90001425	SRKF08-08BFF	44	55,5				
3	M18	150	90001426	SRKF08-18MFF	44	55,5				
3	12L	150					90001416	SRKM08-12L	29,9	55
3	15L	150					90001417	SRKM08-15L	29,9	65
3	12L	150					90001418	SRKM08-SV12L	29,9	58
3	15L	150					90001419	SRKM08-SV15L	29,9	82



Stofkappen/pluggen

BG	code	stofplug	Ø mm	L mm	code	stofkap	Ø mm	L mm
3	90001434	TRKF08-DP	29,9	19	90001432	TRKM-08-DC	37	135

* wordt standaard met vrouwdeel meegeleverd

Uitwisselbaar met: DNP PFT, FASTER VF, Gromelle Q-9000, Inteva 120, Stucci IFR