



Perskoppelingen HNS serie

BSP



GSS Artikel nr	BSP buitendraad											
	Slangmaat			Draad	Afmetingen (mm)					Max W.P.		
	DN	Size	Inch	F	H	L	S			bar	PSI	
HNS-12BM12	20	12	3/4"	3/4"-14	38	89	32				420	6000
HNS-16BM12	20	12	3/4"	1"-11	43	94	41				420	6000
HNS-16BM16	25	16	1"	1"-11	45	101	41				420	6000
HNS-20BM16	25	16	1"	1 1/4"-11	48	104	50				345	5000
HNS-20BM20	32	20	1 1/4"	1 1/4"-11	50	117	50				345	5000
HNS-24BM20	32	20	1 1/4"	1 1/2"-11	53	120	55				345	5000
HNS-24BM24	40	24	1 1/2"	1 1/2"-11	55	138	55				345	5000
HNS-32BM32	50	32	2"	2"-11	63	159	70				345	5000

BSPT




GSS Artikel nr	BSPT buitendraad											
	Slangmaat			Draad	Afmetingen (mm)					Max W.P.		
	DN	Size	Inch	F	H	L	S			bar	PSI	
HNS-12BMT12	20	12	3/4"	3/4"-14	37	88	27				420	6000
HNS-16BMT16	25	16	1"	1"-11	44	101	36				380	5400
HNS-20BMT20	32	20	1 1/4"	1 1/4"-11	51	118	46				325	4600
HNS-24BMT24	40	24	1 1/2"	1 1/2"-11	54	137	50				290	4100
HNS-32BMT32	50	32	2"	2"-11	64	160	65				250	3600

3

Perskoppelingen HNS serie


3

BSP Wartel




GSS Artikel nr	BSP wartel										
	Slangmaat			Draad	Afmetingen (mm)					Max W.P.	
	DN	Size	Inch	F	H	L	S	O'Ring	bar	PSI	
HNS-12BF12	20	12	3/4"	3/4"-14	29	80	32	17x1,5	420	6000	
HNS-16BF12	20	12	3/4"	1"-11	32	83	41	22x1,5	420	6000	
HNS-16BF16	25	16	1"	1"-11	34	90	41	22x1,5	420	6000	
HNS-20BF16	25	16	1"	1 1/4"-11	37	93	50	28,3x1,78	345	5000	
HNS-20BF20	32	20	1 1/4"	1 1/4"-11	39	106	50	28,3x1,78	345	5000	
HNS-24BF20	32	20	1 1/4"	1 1/2"-11	41	107	60	33,05x1,78	345	5000	
HNS-24BF24	40	24	1 1/2"	1 1/2"-11	43	125	60	33,05x1,78	345	5000	
HNS-32BF32	50	32	2"	2"-11	47	143	75	44,17x1,78	345	5000	

BSP wartel 45

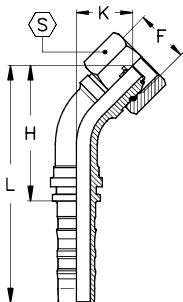

GSS Artikel nr	BSP wartel 45"										
	Slangmaat			Draad	Afmetingen (mm)					Max W.P.	
	DN	Size	Inch	F	H	L	K	S	O'Ring	bar	PSI
HNS-12BF45S12	20	12	3/4"	3/4"-14	67	118	29	32	17x1,5	420	6000
HNS-16BF45S12	20	12	3/4"	1"-11	67	118	29	41	22x1,5	420	6000
HNS-16BF45S16	25	16	1"	1"-11	86	142	36	41	22x1,5	420	6000
HNS-20BF45S16	25	16	1"	1 1/4"-11	86	142	36	50	28,3x1,78	345	5000
HNS-20BF45S20	32	20	1 1/4"	1 1/4"-11	103	169	43	50	28,3x1,78	345	5000
HNS-24BF45S20	32	20	1 1/4"	1 1/2"-11	103	169	43	60	33,05x1,78	345	5000
HNS-24BF45S24	40	24	1 1/2"	1 1/2"-11	123	206	51	60	33,05x1,78	345	5000
HNS-32BF45S32	50	32	2"	2"-11	160	257	65	75	44,17x1,78	345	5000


BSP wartel 90

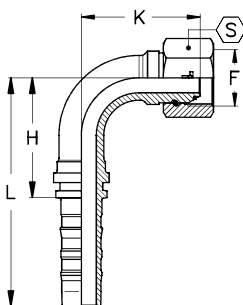

GSS Artikel nr	BSP wartel 90"										
	Slangmaat			Draad	Afmetingen (mm)					Max W.P.	
	DN	Size	Inch	F	H	L	K	S	O'Ring	bar	PSI
HNS-12BF90S12	20	12	3/4"	3/4"-14	55	106	57	32	17x1,5	420	6000
HNS-16BF90S12	20	12	3/4"	1"-11	55	106	57	41	22x1,5	420	6000
HNS-16BF90S16	25	16	1"	1"-11	71	128	72	41	22x1,5	420	6000
HNS-20BF90S16	25	16	1"	1 1/4"-11	71	128	72	50	28,3x1,78	345	5000
HNS-20BF90S20	32	20	1 1/4"	1 1/4"-11	87	154	88	50	28,3x1,78	345	5000
HNS-24BF90S20	32	20	1 1/4"	1 1/2"-11	87	154	88	60	33,05x1,78	345	5000
HNS-24BF90S24	40	24	1 1/2"	1 1/2"-11	105	188	104	60	33,05x1,78	345	5000
HNS-32BF90S32	50	32	2"	2"-11	140	237	137	75	44,17x1,78	345	5000


Perskoppelingen HNS serie

NPT buitendraad

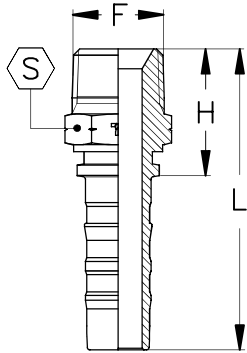


AGN	NPT Buitendraad											
	GSS Artikel nr	Slangmaat			Draad	Afmetingen (mm)					Max W.P.	
		DN	Size	Inch	F	H	L	S			bar	PSI
HNS-12NM12	20	12	3/4"	3/4"-14	39	90	27				420	6000
HNS-16NM12	20	12	3/4"	1"-11,5	47	98	36				380	5400
HNS-12NM16	25	16	1"	3/4"-14	41,5	98	32				420	6000
HNS-16NM16	25	16	1"	1"-11,5	48,5	105	36				380	5400
HNS-20NM16	25	16	1"	1 1/4"-11,5	53	109,5	46				325	4600
HNS-16NM20	32	20	1 1/4"	1"-11,5	52,5	119	41				380	5400
HNS-20NM20	32	20	1 1/4"	1 1/4"-11,5	55	121,5	46				325	4600
HNS-24NM20	32	20	1 1/4"	1 1/2"-11,5	59	125,5	50				290	4100
HNS-24NM24	38	24	1 1/2"	1 1/2"-11,5	61	143,5	50				290	4100
HNS-32NM24	38	24	1 1/2"	2"-11,5	67,5	150	65				250	3600
HNS-32NM32	51	32	2"	2"-11,5	70,5	167	65				250	3600

JIC buitendraad

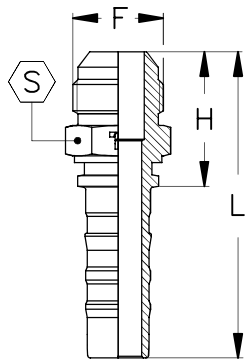

AGJ	JIC Buitendraad											
	GSS Artikel nr	Slangmaat			Draad	Afmetingen (mm)					Max W.P.	
		DN	Size	Inch	F	H	L	S			bar	PSI
HNS-14JM12	20	12	3/4"	7/8"-14	37	88	27				420	6000
HNS-17JM12	20	12	3/4"	1 1/16"-12	40	91	27				420	6000
HNS-19JM12	20	12	3/4"	1 3/16"-12	41,5	92,5	32				420	6000
HNS-21JM12	20	12	3/4"	1 5/16"-12	43	94	36				380	5400
HNS-17JM16	25	16	1"	1 1/16"-12	43	99,5	32				420	6000
HNS-21JM16	25	16	1"	1 5/16"-12	45	101,5	36				380	5400
HNS-26JM16	25	16	1"	1 5/8"-12	48	104,5	46				325	4600
HNS-21JM20	32	20	1 1/4"	1 5/16"-12	48,5	115	41				380	5400
HNS-26JM20	32	20	1 1/4"	1 5/8"-12	50,5	117	46				325	4600
HNS-30JM20	32	20	1 1/4"	1 7/8"-12	55	121,5	50				290	4100
HNS-30JM24	38	24	1 1/2"	1 7/8"-12	57	139,5	50				290	4100
HNS-40JM24	38	24	1 1/2"	2 1/2"-12	65,5	148	65				250	3600
HNS-40JM32	51	32	2"	2 1/2"-12	68,5	165	65				250	3600

JIC wartel

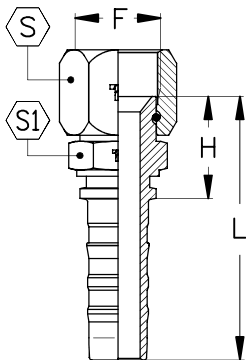

DKJ	JIC Wartel											
	GSS Artikel nr	Slangmaat			Draad	Afmetingen (mm)					Max W.P.	
		DN	Size	Inch	F	H	L	S	S1			bar
HNS-14JF12	20	12	3/4"	7/8"-14	33	84	27	27			420	6000
HNS-17JF12	20	12	3/4"	1 1/16"-12	34	85	32	27			420	6000
HNS-19JF12	20	12	3/4"	1 3/16"-12	35,5	86,5	36	30			420	6000
HNS-21JF12	20	12	3/4"	1 5/16"-12	38	89	41	32			380	5400
HNS-17JF16	25	16	1"	1 1/16"-12	36,5	93	32	32			420	6000
HNS-21JF16	25	16	1"	1 5/16"-12	39,5	96	41	32			380	5400
HNS-26JF16	25	16	1"	1 5/8"-12	46	102,5	50	41			325	4600
HNS-21JF20	32	20	1 1/4"	1 5/16"-12	45,5	112	41	41			380	5400
HNS-26JF20	32	20	1 1/4"	1 5/8"-12	48	114,5	50	41			325	4600
HNS-30JF20	32	20	1 1/4"	1 7/8"-12	51	117,5	60	46			290	4100
HNS-30JF24	38	24	1 1/2"	1 7/8"-12	53	135,5	60	46			290	4100
HNS-40JF24	38	24	1 1/2"	2 1/2"-12	66	148,5	75	60			250	3600
HNS-40JF32	51	32	2"	2 1/2"-12	69	165,5	75	60			250	3600